

FANUC Robot M-2000iA



FEATURES


“Super Heavy Payload Robot” FANUC Robot M-2000iA is the heavy payload robot with a payload capacity of 900kg - 2300kg.

- Four models are available to meet a variety of applications.
 - **FANUC Robot M-2000iA/1200**
FANUC Robot M-2000iA/2300
These models are heavy payload Types which have 1200kg (1350kg option) and 2300kg payload capacity, and have 3.7m reach and 4.6m vertical stroke.
They can be applied to handling of heavy work piece such as large castings and structures.
 - **FANUC Robot M-2000iA/900L**
FANUC Robot M-2000iA/1700L
These models are long arm Types which have 900kg and 1700kg payload, and have 4.7m reach and 6.2m vertical stroke. These models have a wide motion envelope and can be applied to lifting and handling large size structures.
- The wrist can be used safely in harsh environment because it has IP67-equivalent resistance to environmental conditions (dust and dips).
- Latest intelligent functions with *i*RVision (integrated vision) are available.

Application system





Completed car handling by M-2000iA/1700L

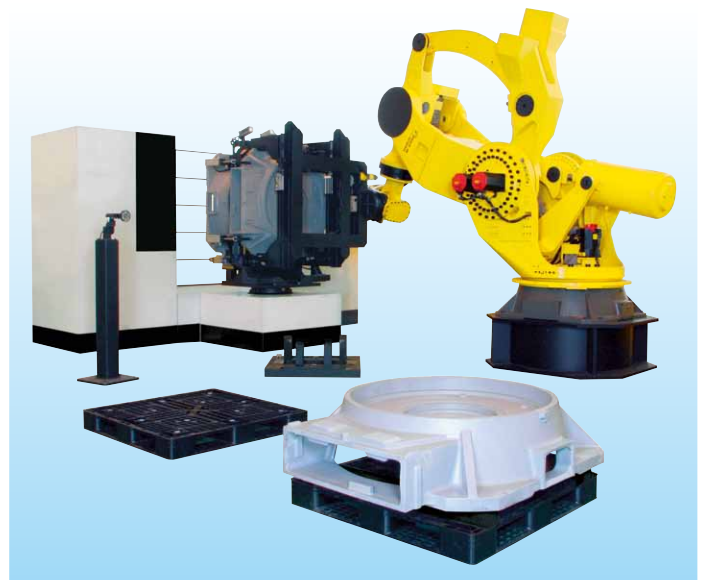



Large casting machine tending by M-2000iA/1200

Operating space

M-2000iA/1200,/900L

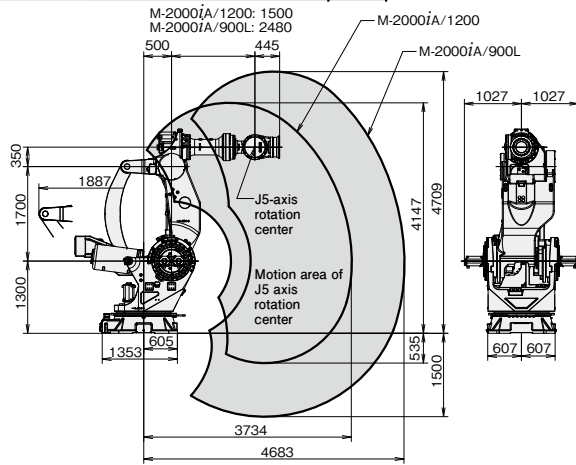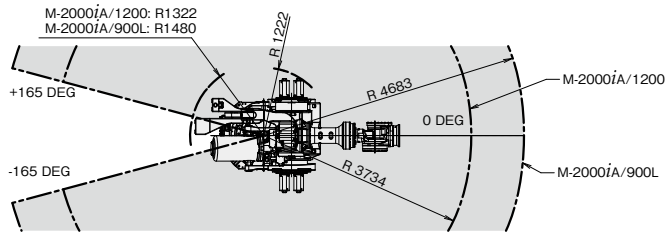

M-2000iA/2300,/1700L

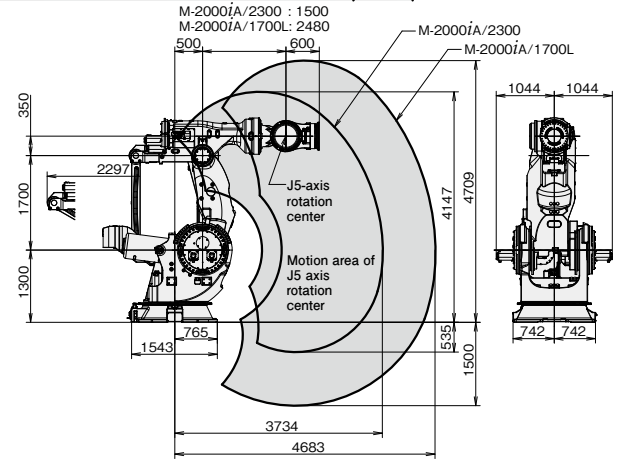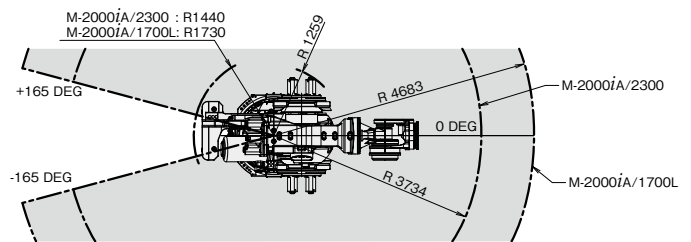

Specifications

Item	Specifications			
	M-2000iA/1200	M-2000iA/900L	M-2000iA/2300	M-2000iA/1700L
Type	Articulated Type			
Controlled axes	6 axes (J1, J2, J3, J4, J5, J6)			
Reach	3734 mm	4683 mm	3734 mm	4683 mm
Installation	Floor			
Motion range (Maximum speed) (Note1)	J1 axis rotation	330° (45°/s) 5.76 rad (0.79 rad/s)		330° (20°/s) 5.76 rad (0.35 rad/s)
	J2 axis rotation	160° (30°/s) 2.79 rad (0.52 rad/s)		160° (14°/s) 2.79 rad (0.24 rad/s)
	J3 axis rotation	165° (30°/s) 2.88 rad (0.52 rad/s)		165° (14°/s) 2.88 rad (0.24 rad/s)
	J4 axis wrist rotation	720° (50°/s) 12.57 rad (0.87 rad/s)		720° (18°/s) 12.57 rad (0.31 rad/s)
	J5 axis wrist swing	240° (50°/s) 4.19 rad (0.87 rad/s)		240° (18°/s) 4.19 rad (0.31 rad/s)
	J6 axis wrist rotation	720° (70°/s) 12.57 rad (1.22 rad/s)		720° (40°/s) 12.57 rad (0.70 rad/s)
Max. load capacity at wrist	1200 kg 1350 kg (Note2)	900 kg	2300 kg	1700 kg
Max. load capacity at J2 base	550 kg			
Max. load capacity at J3 arm	50 kg			
Allowable load moment at wrist	J4 axis	14700 N·m 1500 kgf·m		29400 N·m 3000 kgf·m
	J5 axis	14700 N·m 1500 kgf·m		29400 N·m 3000 kgf·m
	J6 axis	4900 N·m 500 kgf·m		8820 N·m 900 kgf·m
Allowable load inertia at wrist	J4 axis	2989 kg·m ² 30500 kgf·cm·s ²		7500 kg·m ² 76531 kgf·cm·s ²
	J5 axis	2989 kg·m ² 30500 kgf·cm·s ²		7500 kg·m ² 76531 kgf·cm·s ²
	J6 axis	2195 kg·m ² 22400 kgf·cm·s ²		5500 kg·m ² 56122 kgf·cm·s ²
Drive method	Electric servo drive by AC servo motor			
Repeatability	± 0.3 mm	± 0.5 mm	± 0.3 mm	± 0.5 mm
Mass (Note3)	8600 kg	9600 kg	11000 kg	12500 kg
Installation environment	Ambient temperature : 0 to 45°C Ambient humidity : Normally 75 %RH or less (No dew nor frost allowed) Short term Max.95 %RH or less (within one month) Vibration acceleration : 4.9 m/s ² (0.5G) or less			

Note 1) In case of short distance motion, the axis speed may not reach the maximum value stated.

Note 2) With 1350kg option.

Note 3) Without controller.

FANUC CORPORATION

Headquarters Oshino-mura, Yamanashi 401-0597, Japan

Phone: 81-555-84-5555 Fax: 81-555-84-5512 <http://www.fanuc.co.jp>

Overseas Affiliated Companies

FANUC America Corporation
 FANUC Europe Corporation, S.A.
 SHANGHAI-FANUC Robotics CO., LTD.
 KOREA FANUC CORPORATION
 TAIWAN FANUC CORPORATION
 FANUC INDIA PRIVATE LIMITED
 FANUC SINGAPORE PTE. LTD.
 FANUC THAI LIMITED
 FANUC MECHATRONICS (MALAYSIA) SDN. BHD.
 PT. FANUC INDONESIA
 FANUC OCEANIA PTY. LIMITED
 FANUC SOUTH AFRICA (PROPRIETARY) LIMITED

3900 West Hamlin Road, Rochester Hills, MI 48309-3253, U.S.A.
 Zone Industrielle, L-6468 Echternach, Grand-Duché de Luxembourg
 No. 1500 Fulian Road, Baoshan Area, Shanghai, China
 101, Wanam-ro(st), Seongsan-gu, Changwon-si, Gyeongsangnam-do, 642-290 Republic of Korea
 No.10, 16th Road, Taichung Industrial Park, Taichung, Taiwan
 41-A, Electronics City, Bangalore, 560 100, India
 No.1 Teban Gardens Crescent, Singapore 608919, Singapore
 1301 Pattanakarn Road, Kwaeng Suanluang, Khet Suanluang, Bangkok 10250 Thailand
 No.32, Jalan Pengacara U1/48, Temasya Industrial Park, Section U1, Glenmarie,
 40150 Shah Alam, Selangor Darul Ehsan, Malaysia
 JL. Boulevard Bukit Gading Raya Blok R, Jakarta 14240 Indonesia
 10 Healey Circuit, Huntingwood, NSW 2148, Australia
 17 Loper Ave, Aeroport Industrial Ests. Spartan Ext.2 P.O.Box 219, Isando 1600, Republic of South Africa

Phone: 1-248-377-7000 Fax: 1-855-774-7051
 Phone: 352-727777-1 Fax: 352-727777-403
 Phone: 86-21-5032-7700 Fax: 86-21-5032-7711
 Phone: 82-55-278-1200 Fax: 82-55-284-9826
 Phone: 886-4-2359-0522 Fax: 886-4-2359-0771
 Phone: 91-80-2852-0057 Fax: 91-80-2852-0051
 Phone: 65-6567-8566 Fax: 65-6566-5937
 Phone: 66-2-714-6111 Fax: 66-2-714-6120
 Phone: 60-3-7628-0110 Fax: 60-3-7628-0220
 Phone: 62-21-4584-7285 Fax: 62-21-4584-7288
 Phone: 61-2-8822-4600 Fax: 61-2-8822-4666
 Phone: 27-11-392-3610 Fax: 27-11-392-3615

- All specifications are subject to change without notice.
- No part of this catalog may be reproduced in any form.
- The products in this catalog are controlled based on Japan's "Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.